



# CB460B MATE OF TRUCK

The striking appearance, excellent performance in truck tires' balance, bigger display panel, clearer operation instructions, easier to learn.



1200 MM



10" - 24"



200 kg



1,5" - 20"




car 9 sec  
truck 20 sec



car 100 rpm  
truck 200 rpm

# BRIGHT CB460 B

## Line Drawing

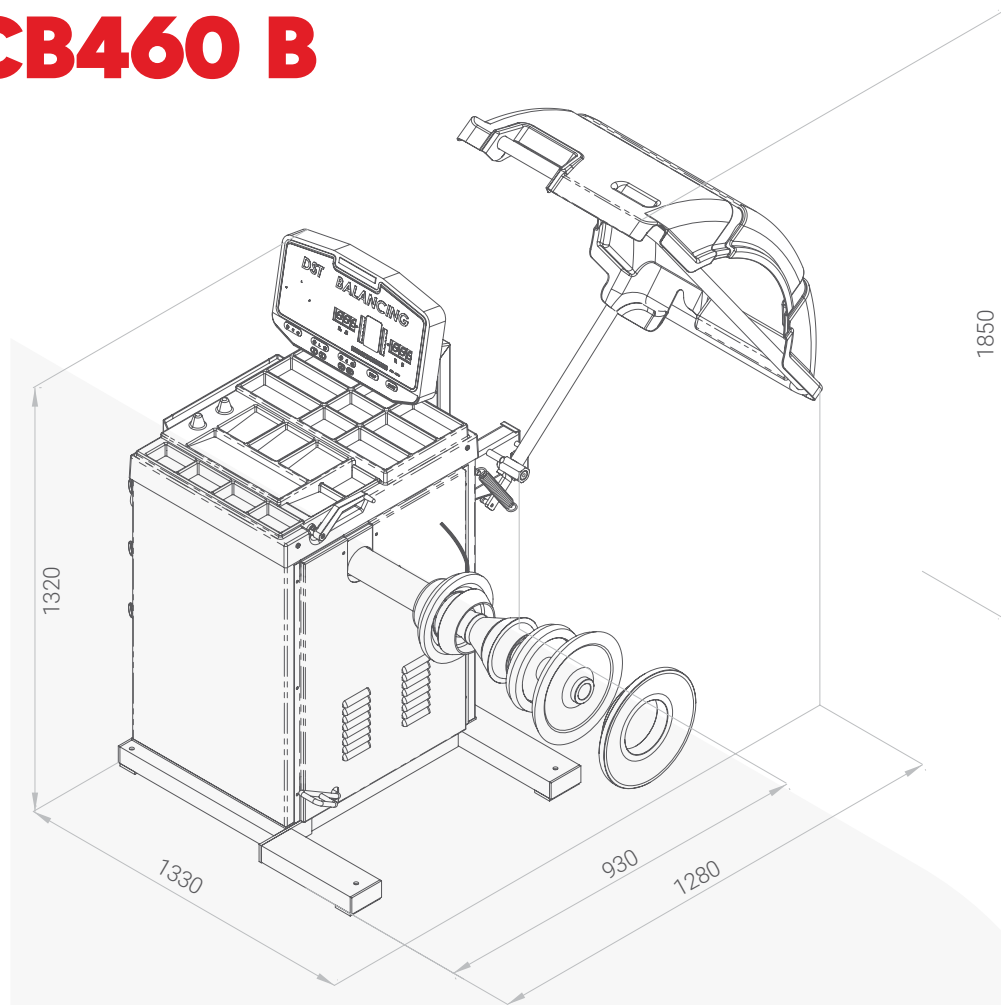

## Selling Point

- The balancer has independent intellectual property rights.
- LED display
- The machine can balance both car wheel and truck wheel.
- Customer can customize display of imbalance in 5 or 10.
- Three ALU balancing programs and STA balancing program.
- Manual brake for easy application of weight.
- The machine can change display from inch to millimeter, gram to ounce.
- The machine is integrated with pneumatic lift, efficiently and labor-saving.
- Clear digital tube display windows, make the data more visually direct from viewing.



## Technical data

Rim diameter	10" - 24" inch
Max wheel weight	200 kg
Max wheel diameter	1200mm
Rim width	1,5" - 20" inch
Precision	±1g (car)/±10g (truck)
Motor Power	0.55kW
Power supply	100/230V 1ph
Rotation per minute	100rpm (car)/200rpm (truck)
Balancing time	9s (car) / 15s (truck)
Second time mounting test	≤5g
Machine dimensions	1330x1280x1320 mm
Packing dimension	1300x990x1130 mm
Net weight	220 kg
Gross weight	270 kg
Loading in 40 Ft. container	42 sets

Regular Use ●●●● ●●●●